


REV.	DESCRIPTION	DATE	REVISER	APPD

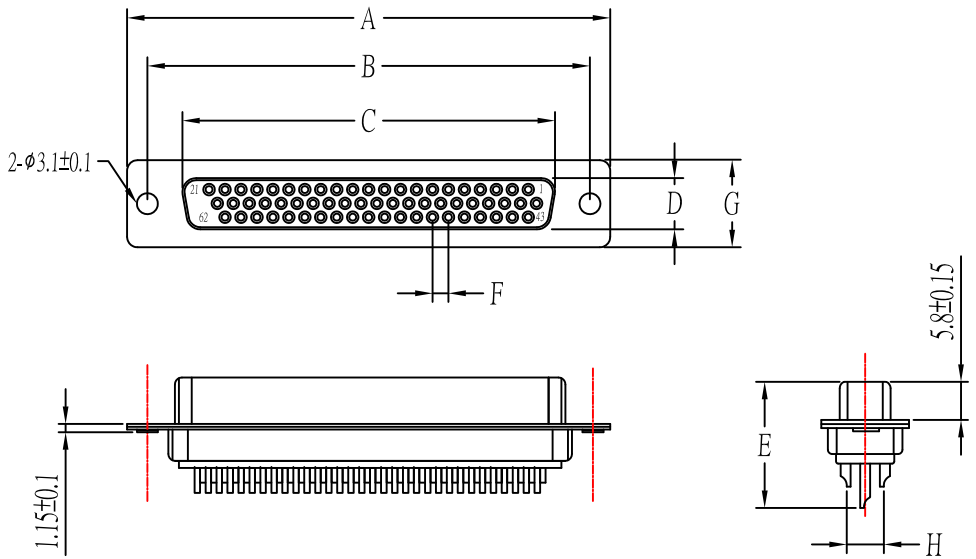

Ordering Information: **PND04 - 62 S B U N - A**

D-SUB CONNECTOR
SOLDER CUP STRAIGHT

NO. OF CONTACT:
15, 26, 44, 62, 78

CONTACT TYPE:
S= FEMALE
P= MALE


CONTACTS PLATING
O= GOLD FLASH
B= SELECTIVE GOLD FLASH

MOUNTING HOLE
A= A TYPE
B= B TYPE
C= C TYPE

SHELL
N= NICKEL PLATED
C= TIN PLATED

INSULATION COLOR
W= WHITE
B= BLACK
U= BLUE


- Note:
- Material:
 - Insulator: High temperature thermoplastic with g.f,UL94v-0
 - Contact: Copper alloy,t=0.20mm
 - Shell: Spcc,t=0.30mm
 - Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 750 V(ac) for 1 min.
 - Contact resistance: 30 mW Max.
 - Insulation resistance: 1000 MW Min.
 - Total mating force: 7.0 Kgf Max.
 - Total unmating force: 1.5 Kgf Min.
 - Temperature range: -55°C~85°C

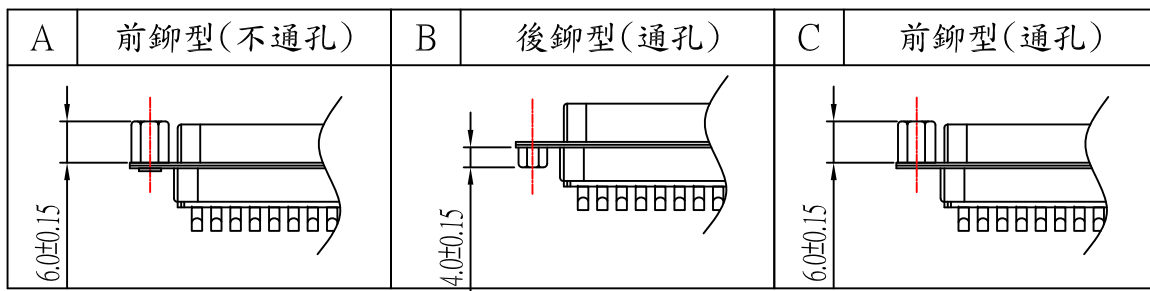

PART NO	A±0.25	B±0.20	C±0.20	D±0.20	E±0.30	F±0.05	G±0.25	H±0.20
PND04 -15S	30.81	24.99	16.33	8.00	16.50	2.29	12.55	3.96
PND04 -26S	39.25	33.32	24.66	8.00	16.50	2.29	12.55	3.96
PND04 -44S	53.04	47.04	38.38	8.00	16.50	2.29	12.55	3.96
PND04 -62S	69.50	63.50	54.84	8.00	16.50	2.41	12.55	3.96
PND04 -78S	67.02	61.04	52.36	10.90	16.50	2.41	15.35	3.96

8	Back-shell	1		
7	Front-shell	1		
6	Clip	1		No finish
5	Contact	4		Selective Au plated on mating area
4	Contact	4		
3	Contact	4		
2	Contact	4		
1	Housing	1		Black
No.	Name	Qty	Part No.	Finish

PART NO:		MATERIAL:		長榮有限公司	
MODEL NO:		FINISH:			
UNIT: mm	SIZE:	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR:		D-SUB HDD SOLDER (Female)	
.x	±0.3	CHK:		DWG NO: PND04-(Female)	
.xx	±0.20	APP:		SCALE: 1:1	
.xxx	±0.100			SHEET: 1 of 1	
ANG.	±1°			REV: A05	

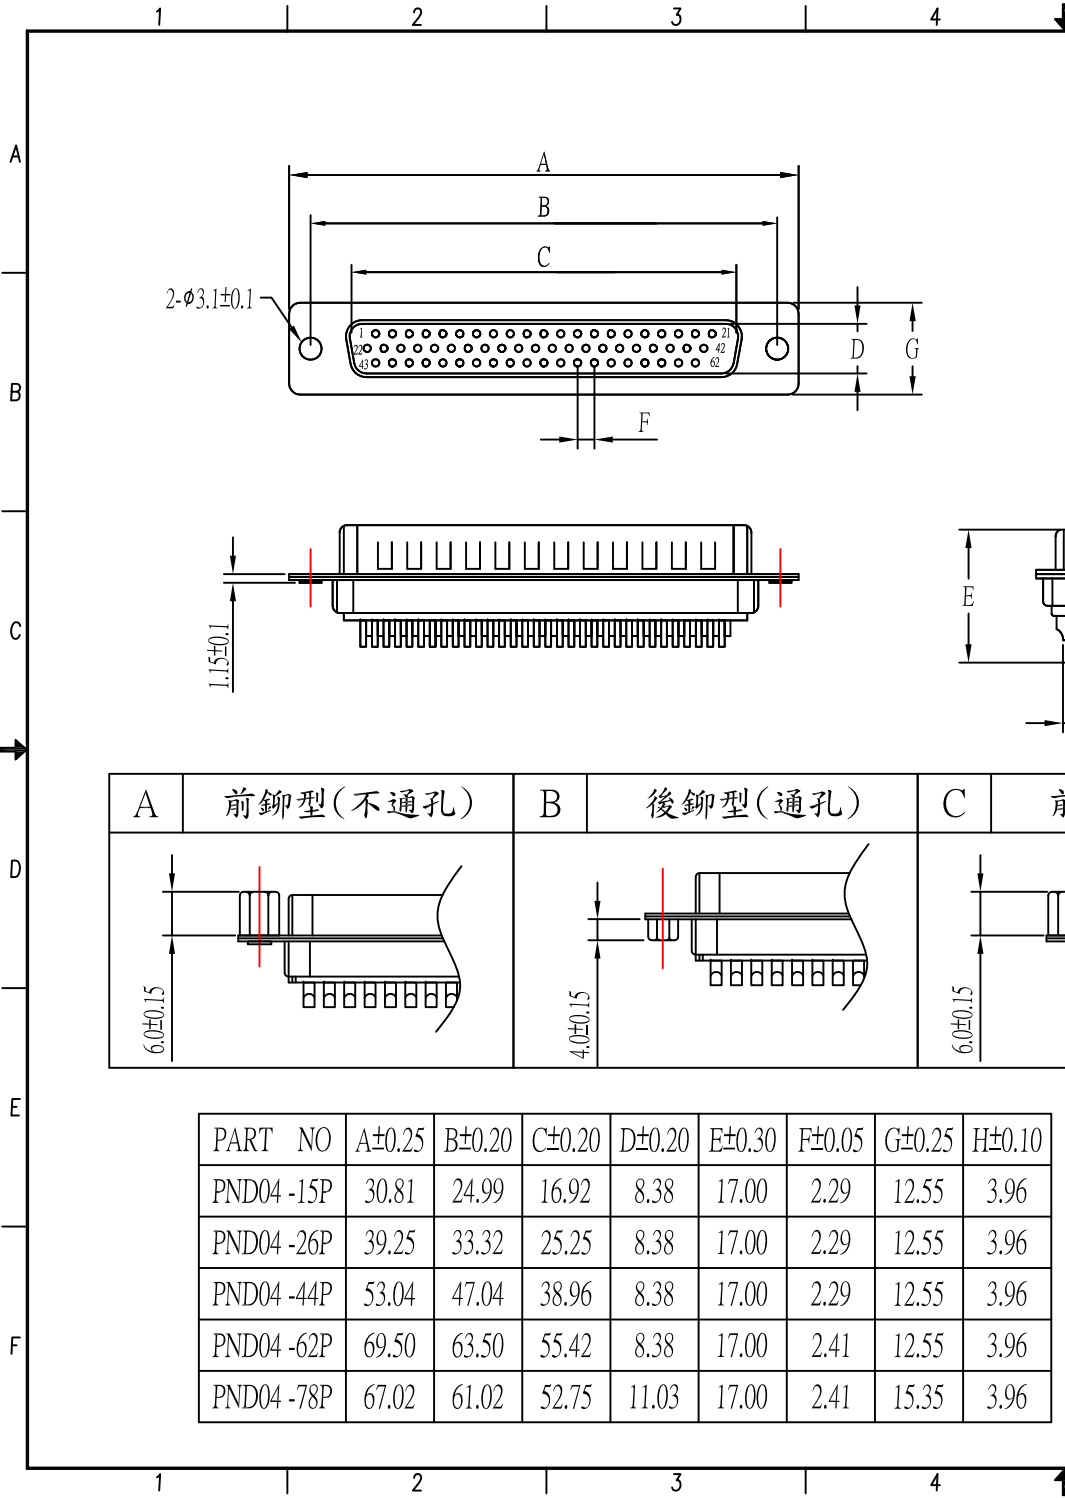

REV.	DESCRIPTION	DATE	REVISER	APPD

Ordering Information: **PND04 - 62 P B U N - A**

D-SUB CONNECTOR
SOLDER CUP STRAIGHT

NO. OF CONTACT:
15, 26, 44, 62, 78

CONTACT TYPE:
S= FEMALE
P=MALE

CONTACTS PLATING
O= GOLD FLASH
B= SELECTIVE GOLD FLASH

MOUNTING HOLE
A= A TYPE
B= B TYPE
C= C TYPE

SHELL
N= NICKEL PLATED
C= TIN PLATED

INSULATION COLOR
W= WHITE
B= BLACK
U= BLUE

- Note:
- Material:
 - Insulator: High temperature thermoplastic with g.f,UL94v-0
 - Contact: Copper alloy,t=0.20mm
 - Shell: Spcc,t=0.30mm
 - Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 750 V(ac) for 1 min.
 - Contact resistance: 30 mW Max.
 - Insulation resistance: 1000 MW Min.
 - Total mating force: 7.0 Kgf Max.
 - Total unmating force: 1.5 Kgf Min.
 - Temperature range: -55°C~85°C

A	前鉚型(不通孔)	B	後鉚型(通孔)	C	前鉚型(通孔)
6.0±0.15		4.0±0.15		6.0±0.15	

8	Back-shell	1		
7	Front-shell	1		
6	Clip	1		No finish
5	Contact	4		Selective Au plated on mating area
4	Contact	4		
3	Contact	4		
2	Contact	4		
1	Housing	1		Black
No.	Name	Q'ty	Part No.	Finish

PART NO	A±0.25	B±0.20	C±0.20	D±0.20	E±0.30	F±0.05	G±0.25	H±0.10
PND04 -15P	30.81	24.99	16.92	8.38	17.00	2.29	12.55	3.96
PND04 -26P	39.25	33.32	25.25	8.38	17.00	2.29	12.55	3.96
PND04 -44P	53.04	47.04	38.96	8.38	17.00	2.29	12.55	3.96
PND04 -62P	69.50	63.50	55.42	8.38	17.00	2.41	12.55	3.96
PND04 -78P	67.02	61.02	52.75	11.03	17.00	2.41	15.35	3.96

PART NO:		MATERIAL:		長榮有限公司	
MODEL NO:		FINSH:			
UNIT: mm	SIZE:	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR:		D-SUB HDD SOLDER (Male)	
.x ±0.3	.xx ±0.20	CHK:		DWG NO: PND04-(Male)	REV: A05
.xxx ±0.100	ANG. ±1°	APP:		SCALE: 1:1	SHEET: 1 of 1