



P.C.Board Layout

SPECIFICATIONS

CURRENT RATING : 3 AMP
 INSULATOR RESISTANCE : 5000 MΩ MIN.
 CONTACT RESISTANCE : 20mΩ MAX.
 DIELECTRIC WITHSTANDING : AC 500 V
 OPERATING TEMPERATURE : -0°C ~ +85°C
 CONTACT MATERIAL : COPPER ALLOY
 STANDARD : P.B.T
 FINISH : TIN, GOLD OR DUPLEX PLATED
 NOTE :
 DUPLEX PLATING : GOLD PLATED ON CONTACT AREA,
 TIN ON SOLDER AREA



No.410, Fu-Teh 1st Road,
 Shijr, Taipei County
 221, Taiwan, R.O.C.

TEL:886-2-26945824

FAX:886-2-26946971




TITLE
 PARTS NO.
 DWG. NO.

1.27mm Pin Header
 Single Row Right Angle Type

PNA01-RA1


GENERAL TOLERANCE
 DIM:
 X. ±0.30
 X.X ±0.20
 X.XX ±0.10

DRAWN		DATE	93/01/30
CHECK		DATE	
APPROVE		DATE	
SCALE	FREE	UNIT	mm
REV.	A		

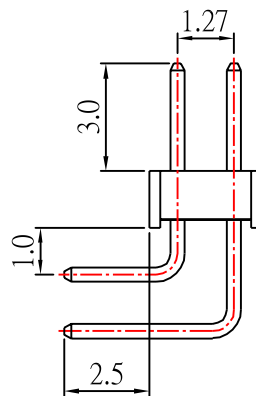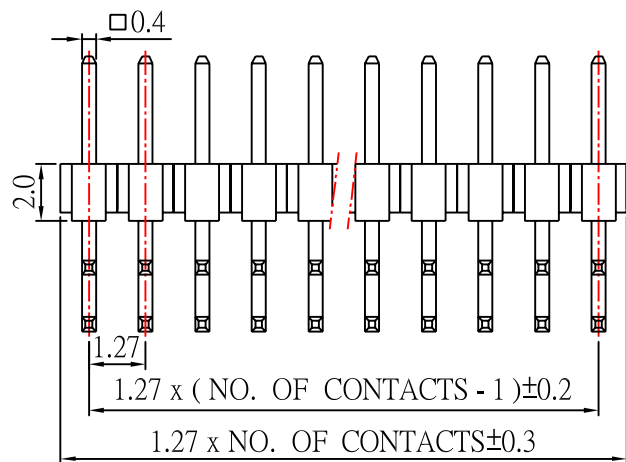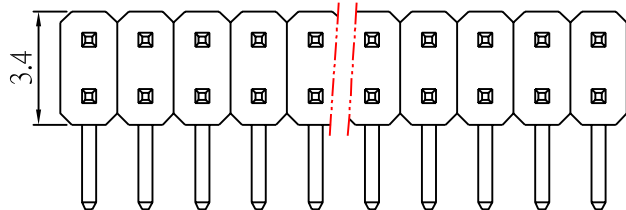

SPECIFICATIONS

CURRENT RATING : 1 AMP
 INSULATOR RESISTANCE : 5000 MΩ MIN.
 DIELECTRIC WITHSTANDING : AC 500 V
 OPERATING TEMPERATURE : -40°C ~ +85°C
 MAX PROCESSING TEMP : 230° FOR 30 SECONDS
 CONTACT MATERIAL : COPPER ALLOY
 INSULATOR MATERIAL : POLYESTER,UL 94V-0
 STANDARD : P.B.T
 FINISH : GOLD PLATED
 STANDARD : GOLD FLASH ALL OVER

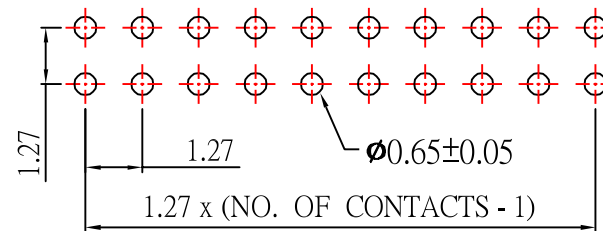

P.C.Board Layout

Chang Enn Co., Ltd.

No.410, Fu-Teh 1st Road,
Shijr, Taipei County
221, Taiwan, R.O.C.

TEL:886-2-26945824

FAX:886-2-26946971

TITLE

PARTS NO.

DWG. NO.

1.27mm PIN HEADER
RIGHT ANGLE TYPE

PNA01-RA2

GENERAL
TOLERANCE

DIM:

X. ±0.30

X.X ±0.20

X.XX ±0.10

DRAWN

CHECK

APPROVE

SCALE

DATE

DATE

DATE

UNIT




92/05/16

DATE

DATE


UNIT

mm REV. 00

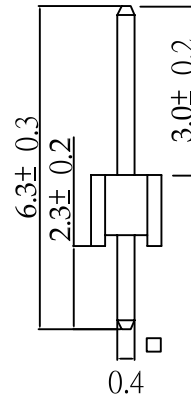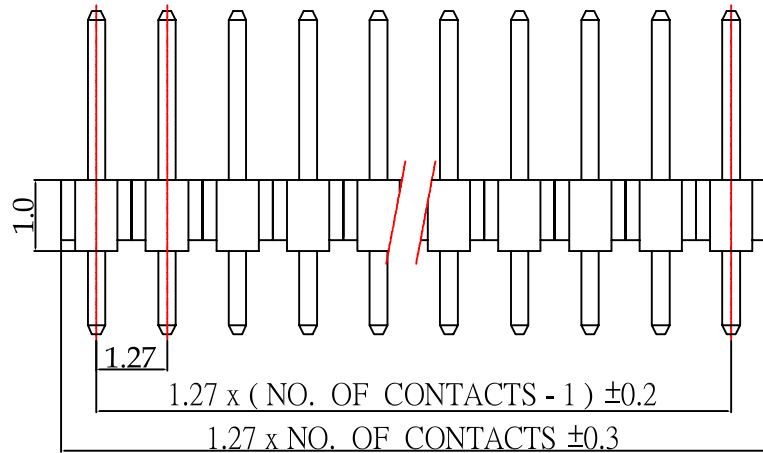

SPECIFICATIONS

CURRENT RATING : 3 AMP
 INSULATOR RESISTANCE : 5000 MΩ MIN.
 DIELECTRIC WITHSTANDING : AC 500 V
 OPERATING TEMPERATURE : -0°C ~ +85°C
 CONTACT MATERIAL : COPPER ALLOY
 STANDARD : P.B.T
 FINISH : TIN, GOLD OR DUPLEX PLATED
 STANDARD : GOLD FLASG ALL OVER
 NOTE :
 DUPLEX PLATING : GOLD PLATED ON CONTACT AREA,
 TIN ON SOLDER AREA

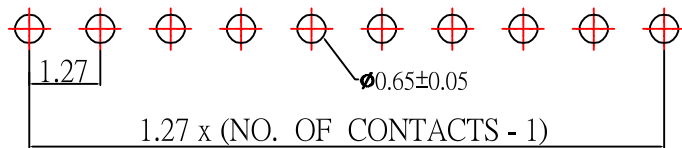

P.C.Board Layout

Enn.com Chang Enn Co., Ltd.

No.410, Fu-Teh 1st Road,
Shijr, Taipei County
221, Taiwan, R.O.C.

TEL:886-2-26945824

FAX:886-2-26946971

TITLE

1.27mm PIN HEADER 180° TYPE

PARTS NO.

PNA01-SA1

DWG. NO.

GENERAL TOLERANCE

DIM: ±0.30

DRAWN

CHECK

APPROVE

SCALE

DATE

DATE

DATE


UNIT

93/06/24

mm




REV.

A

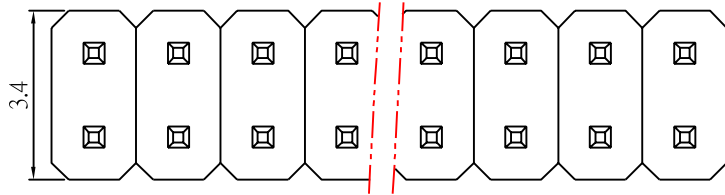

SPECIFICATIONS

CURRENT RATING : 1 AMP
 WITHSTANDING VOLTAGE : 600VAC(1 MIN)
 INSULATOR RESISTANCE : 1000 MEGOHMS MIN
 CONTACT RESISTANCE : 30MILLIOHMS MAX
 OPERATING TEMPERATURE : -40C TO +105C
 RETENTION FORCE : 250G MIN
 MATERIAL
 CONTACT :PHOSPHOR BRONZE
 0.4mm SQUARE POST
 INSULATOR : NYLON 6T+30%G.F.
 PLATING : GOLD

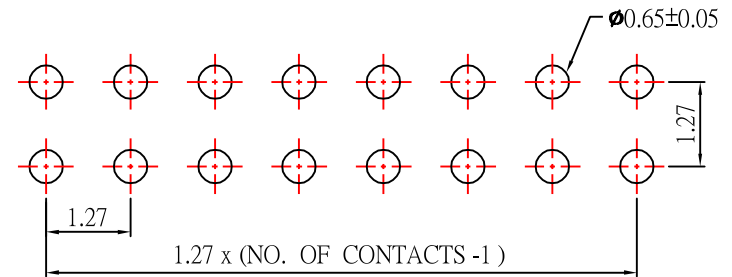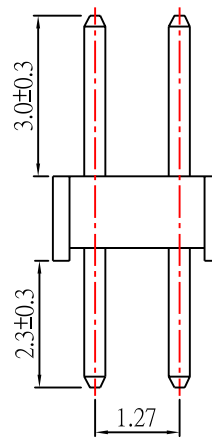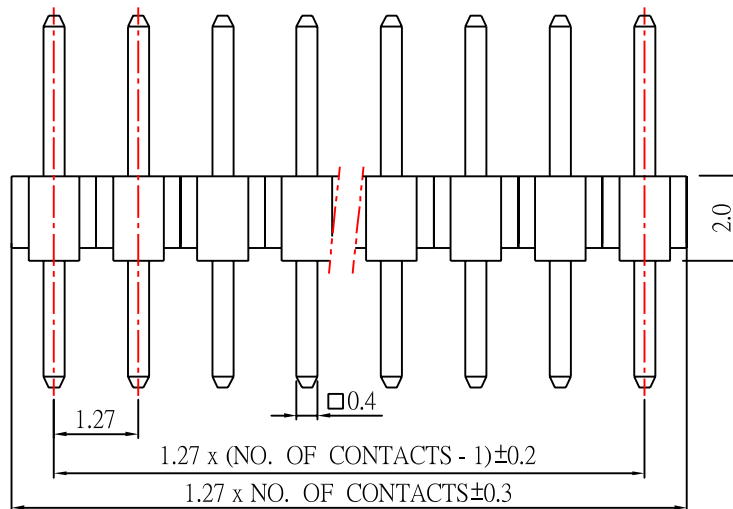

P.C.Board Layout

Enn Corp Chang Enn Co., Ltd.

No.410, Fu-Teh 1st Road,
Shijr, Taipei County
221, Taiwan, R.O.C.

TEL:886-2-26945824

FAX:886-2-26946971

TITLE

1.27mm PIN HEADER 180° TYPE

PARTS NO.

PNA01-SA2

DWG. NO.

GENERAL
TOLERANCE
DIM:

±0.30

DRAWN

DATE

93/07/02

CHECK

DATE

APPROVE

DATE

SCALE

FREE

UNIT

mm

REV.

A