


MODEL	RESOLUTION	MODE 1	MODE 2	MODE 3	MODE 4	MODE 5	MODE 6
12 RGB	512x384	1345	13456	1347	1348	13487	134
13 RGB	640x480 86Hz	145	1456	147	148	1487	14
PORTRAIT	640x870	2345	23456	2347	2348	23487	234
VGA/SVGA	640x480/800x600 80Hz	235	2356	237	238	2387	23
	15" TLT	245	2456	247	248	2487	24
16 COLOR	832x624	135	1356	137	138	1387	13
19 COLOR	1024x768	125	1256	127	128	1287	12
21 COLOR	1152x870	12345	123456	12347	12348	123487	1234
2 PAGE MONO	1152x870	345	3456	347	348	3487	34
	"NISC	1245	12456	1247	1248	12487	124
	"NISC/PAL	1235	12356	1237	1238	12387	123
	HI-RES(12-14)	145	1456	147	148	1487	14
	MULTIPLE SCAN 14	14569	145689	14789	14889	148789	1489
	MULTIPLE SCAN 16	1458	14586	1478	1488	14878	148
	MULTIPLE SCAN 21	1459	14589	1479	1489	14879	149

MODEL	Mean	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9	SW10
1345		ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF

MODE 1 IS COMPOSITE SYNC(1)	SYNC signal (DB-15M pin 3) connected to DB-15F pin 13
MODE 2 IS COMPOSITE SYNC(2)	DB-15M pin 3 & 15 conn HD-15F pin 13
MODE 3 IS SYNC ON V	DB-15M pin 12 conn to HD-15F pin 14
MODE 4 IS SYNC ON D	DB-15M pin 15 conn to HD-15F pin 13
MODE 5 IS SEPARATE SYNC	DB-15M pin 12 conn to HD-15F pin 14 DB-15M pin 15 conn to HD-15F pin 13
MODE 6 IS SYNC ON GREEN	SYNC on GREEN

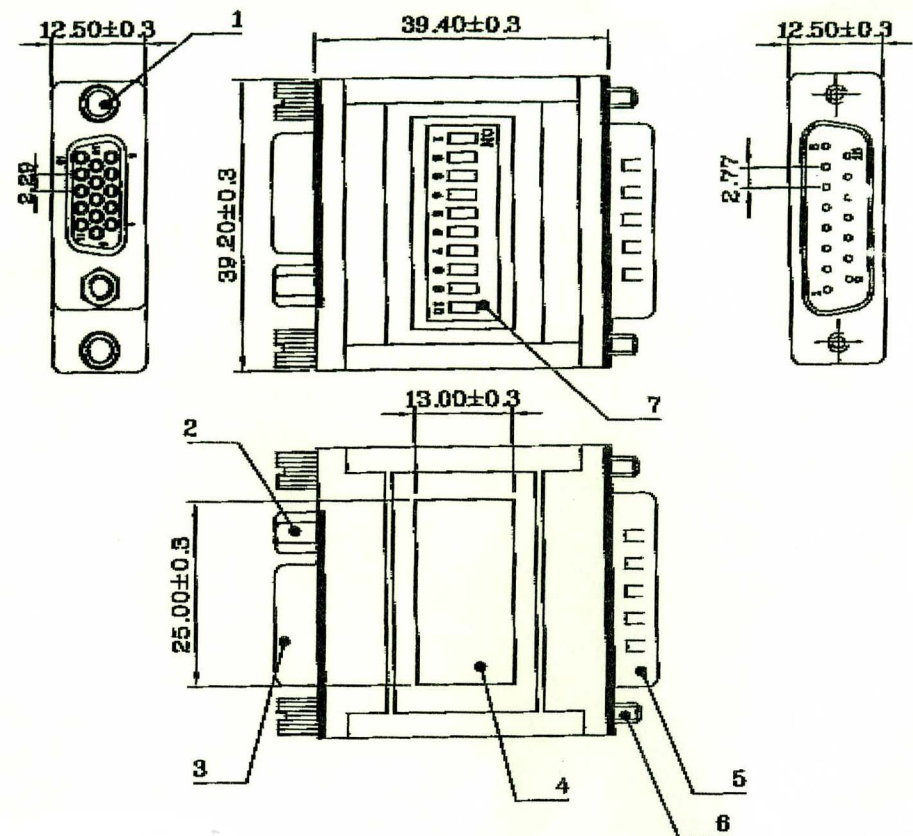

• 100% TEST

COMPONENTS	DESCRIPTION	Q'TY	APPROVED BY:	DATE:
1	Screw Lock UNC #4-40 Metal Nickel Plated	2	Chang Enn Co., Ltd.	
2	Screw Lock UNC #4-40 Metal Nickel Plated	1		CHECKED BY:
3	HD15F High-Density 15P Female Connector Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Brass G/F Gold Plating	1	DESIGN BY:	DATE:
4	Molded P.V.C Molded Color: Beige	1	PART NO: ADDB15M/H15F SCALE: X:1 UNIT: mm	
5	DB15M D-SUB 15P Female Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Brass G/F Gold Plating	1		
6	Jackscrew UNC #4-40 Metal Nickel Plated	2	DRAWN BY:	DRAWING NO:
7	Switch 10 ways	1	UPJEN	10WAYS