


**SPECIFICATIONS**

CURRENT RATING : 1 AMP  
 INSULATOR RESISTANCE : 500 MΩ MIN.  
 CONTACTS RESISTANCE : 20 mΩ MAX.  
 DIELECTRIC WITHSTANDING : AC 500 V  
 OPERATING TEMPERATURE : -40°C ~ +105°C  
 MAX PROCESSING TEMP : 230°C FOR 10 SECONDS  
 CONTACT MATERIAL : PHOSPHOR BRONZE  
 INSULATOR MATERIAL : POLYESTER, UL 94V-0  
 STANDARD : FR50 OR NYLON-6T  
 FINISH : 0.6μ" GOLD PLATED

PROCESSED BY: CHANG ENN CO., LTD.  
 DATE: 2017/10/17  
 DRAWN BY: CHANG ENN CO., LTD.  
 CHECK BY: CHANG ENN CO., LTD.  
 APPROVE BY: CHANG ENN CO., LTD.

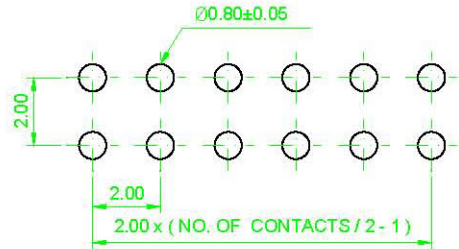

P.C.Board Layout

長 榮 有 限 公 司  
 Chang Enn Co., Ltd.

	THIRD ANGLE PROJECTION	DESIGN UNITS mm <input type="checkbox"/> INCH <input type="checkbox"/>	TITLE: 2.00mm FEMALE HEADER DUAL ROW STRAIGHT TYPE	GENERAL TOLERANCES: ±0.30	DRAWN	DATE	96/10/17
SIZE: A4	SCALE: FREE	SHEET: 1/1	PARTS NO.: PNB31-S2		CHECK	DATE	
CPN NO.:			DWG NO.:	REV: 02	APPROVE	DATE	
DAN NO.:							