


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

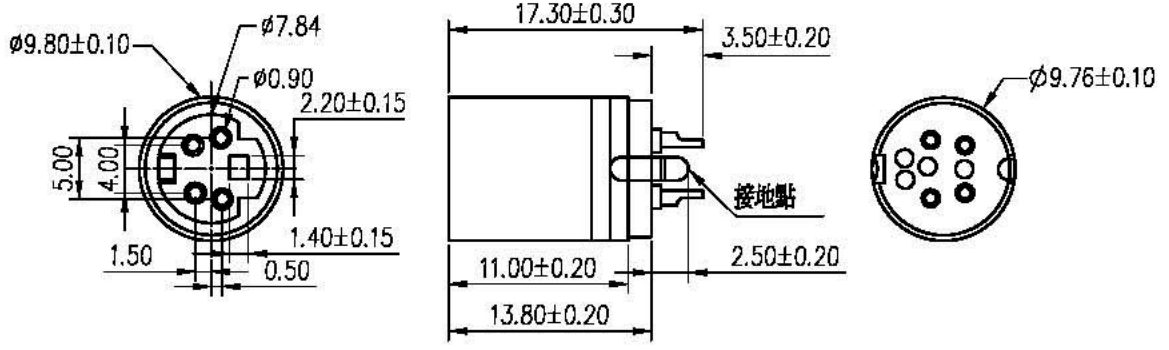

ORDER INFORMATION

MD -3 S  
1 2 3

- 1.MINI DIN: SOLDER TYPE
- 2.POSITION: 3,4,5,6,7,8
- 3.S: SOCKET

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Brass,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 0.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts: Gold flashed 1u",3u",5u",10u",15u",30u".
- 3.2 Shell: Nickel plated or Gold plated

NO.OF CONTACT	3	4	5	6	7	8
PART NO.	MD-3S	MD-4S	MD-5S	MD-6S	MD-7S	MD-8S
POSITION						

4	Grounding Strip	1	Phosphor bronze	T=0.20mm	Nickel Plated
3	Shell	1	Brass	T=0.30mm	Nickel/Gold Plated
2	Contact	3~8	Brass	T=0.20mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Green/Purple
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:	MATERIAL:	CHANG ENN CO., LTD.			
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME: MINI DIN SOLDER TYPE(F)地線		
TOLERANCE UNSPECIFIED	DR: '06/04/21	CHK: '06/04/21	APP: '08/04/21	DWG NO: PND34-11	REV: AO
.x ±0.3				SCALE: 2:1	SHEET: 1 of 1
.xx ±0.20					
.xxx ±0.100					
ANG. ±1°					