
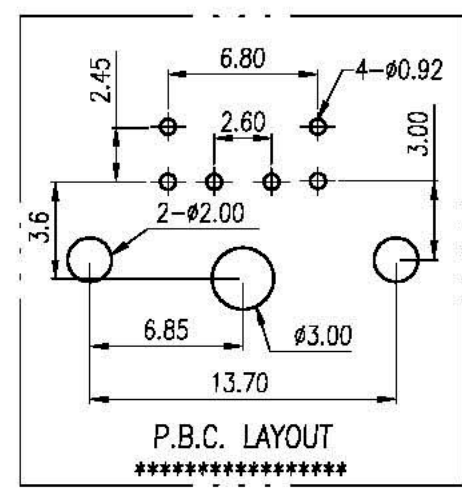
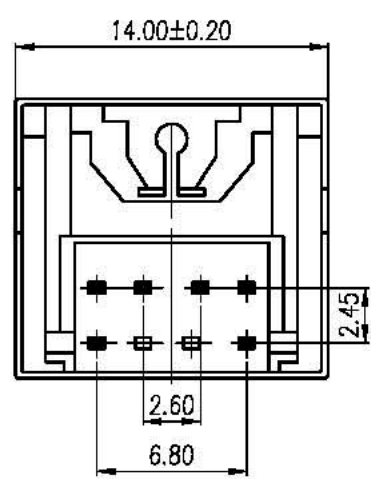
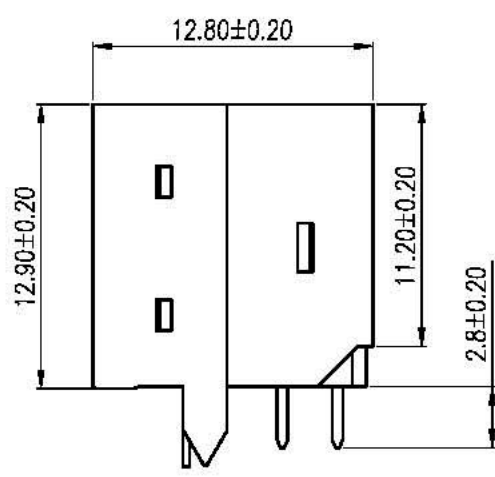


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

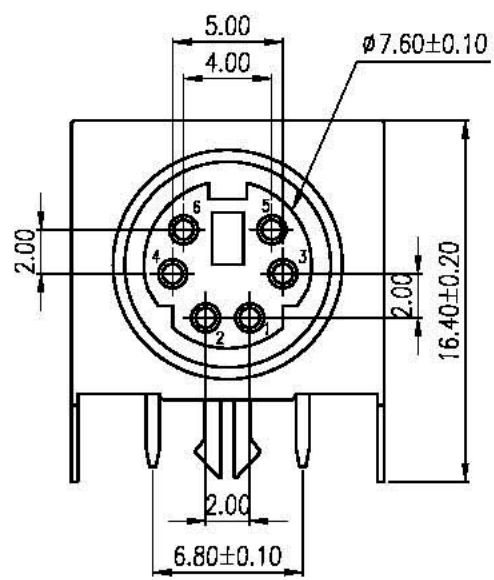

Note:

1. Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze, t=0.20mm.
- 1.3 Boardlock: Cold rolled steel, t=0.40mm.
- 1.4 Shell: Brass, t=0.30mm.

2. Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 2.5 Kgf Max.
- 2.6 Total unmating force: 0.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3. Finishes:

- 3.1 contacts: Gold flashed 1u", 3u", 5u", 10u", 15u", 30u".
- 3.2 Shell: Nickel plated

3	Shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	6	Phosphor bronze	T=0.20mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Green/Purple
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:		CHANG ENN CO., LTD.	
MODEL NO:		FINSH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME: MINI DIN RIGHT ANGLE P.B.C	
TOLERANCE UNSPECIFIED		DR: '06/05/04		6PIN TYPE(F)全包式	
.x ±0.3	.xx ±0.20	CHK: '06/05/04		DWG NO: PND34-15	REV: A0
.xxx ±0.100	ANG. ±1°	APP: '06/05/04		SCALE: 2:1	SHEET: 1 of 1